

MULTIKILOAMPERE MAGNETRON GUN WITH SECONDARY EMISSION AT RELATIVISTIC VOLTAGE

S.A. Cherenshchykov

National Science Center "Kharkov Institute of Physics and Technology", Kharkov, Ukraine

E-mail: cherench@kipt.kharkov.ua

Magnetron gun for voltage up 1000 kV and current more 1 kA was tested in pulse mode. The secondary emission nature of the cathode current was established. The identification was held basing on considered features of the exciting and on the maintenance of the secondary emission current. The gun may be used for charge particle accelerators and RF power sources.

PACS: 29.27.-a; 79.20.Hx

INTRODUCTION

The lifetime of modern power electron sources is not long enough (10...10.000 hours), while other components of the accelerator equipment serve much longer (more than 100.000 hours). Relatively short lifetime depend of application a heating thermionic cathode. Nearly twenty years ago secondary emission mode in magnetron injection gun with a cold cathode [1,2] was achieved. Thus the Secondary Emission Magnetron Injection Gun (SEMIG) [3] was realized as alternative for power electron sources with thermionic cathode. SEMIG is a novel universal electron source with a cold cathode. It may be used for charge particle accelerators in injectors and power electron vacuum devices (RF and pulse). This gun is based on an unconventional principle. The principle is the self-sustained secondary-emission multiplication in crossed-fields. The SEMIG may have higher current density and lifetime much longer (up to 100.000 hours) than conventional thermionic guns.

However, up to nowadays these sources didn't reach the current and power levels featuring the most of thermionic guns. In last experiments maximum secondary emission current in crossed fields was little bit above 200 A [4]. This work deals with investigation of the possibility to increase significantly the current and power of secondary emission sources.

1. TEST SET-UP

An experimental investigation of a secondary electron emission in the magnetron gun (SEMIG) in pulse voltage range of 0.3...1.0 MV was made using an accelerator "Start". Both microsecond and nanosecond output circuits of the accelerator were used. In both cases the stainless-steel cathode with diameter 102 mm was used.

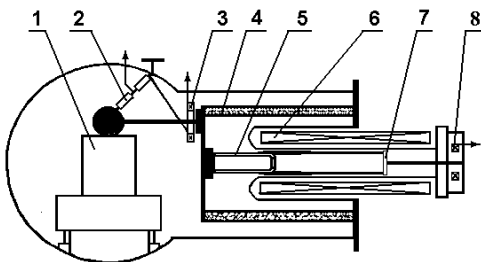


Fig. 1. Scheme of the microsecond output with SEMIG:

- 1 – 8 stage Marx generator; 2 – voltage divider;
- 3 – Rogowski coil for total current; 4 – insulator;
- 5 – cathode; 6 – solenoid; 7 – collector with copper target; 8 – Rogowski coil for beam current

The schema of the microsecond channel is showed on Fig. 1. The short-pulse output is shown on Fig. 2.

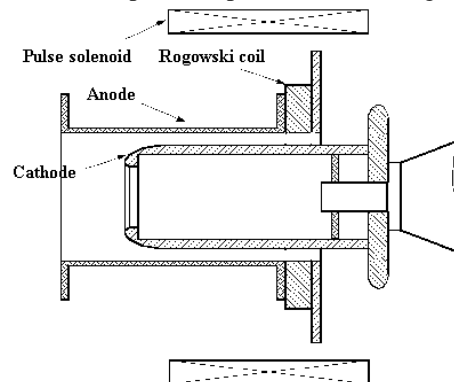


Fig. 2. The gun design for nanosecond mode

2. RESULTS

At microsecond output gun voltage and beam current oscillograms are shown on Fig. 3, and a ring beam track on a copper target is shown on Fig. 4.

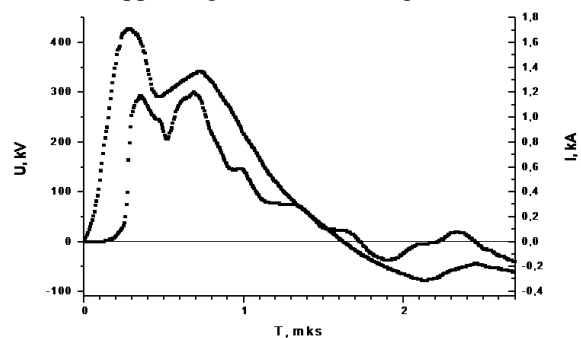


Fig. 3. Gun voltage (first, up) and beam current (second, down) at magnetic field $B=0.34$ T at the microsecond output



Fig. 4. Ring beam track on a copper target with diameter 140 mm at the microsecond output

Pulse fronts are restored because of recording system of the oscilloscope gives blanks. It is due to too fast motion of the ray on the screen.

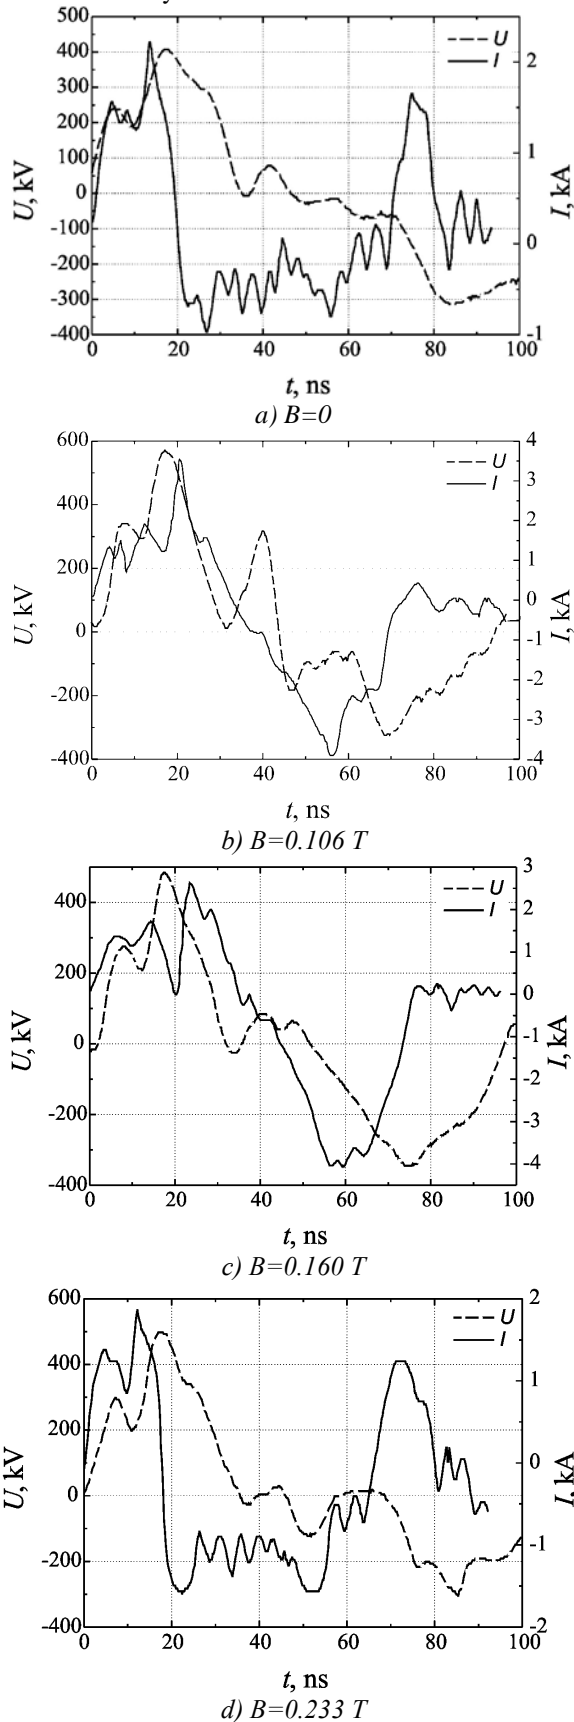


Fig. 5. Synchronous oscillograms of the gun current and voltage at different values of a magnetic field B are shown. The charge voltage of the Marx generator was 32 kV

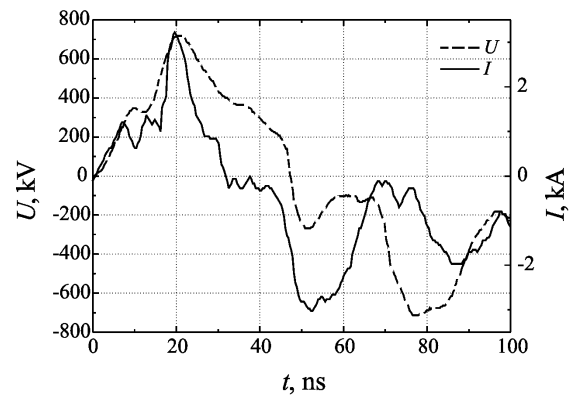


Fig. 6. Synchronous oscillograms of the gun current and voltage at a magnetic field $B=0.266$ T are shown. The charge voltage of the Marx generator was 40 kV

If current amplitude at 20-th ns on the Fig. 6 correspond secondary emission mode and if apply correction on displacement current the maximum achieved is estimated as 5 kA.

3. DISCUSSION OF THE RESULTS

Emission current reaches multi kiloampere level. Given results and their initial analysis point they can be secondary emission currents by their nature. The emission nature must be revised due to explosive emission can be excited at so high voltage values. Therefore, all possible identifiers of secondary emission with comments by their nature and realization are outlined by special items.

1. No emission without magnetic field.

It is electrons would return on a cathode for the secondary emission initiation. That is possible only under transverse magnetic field action.

There is no emission current without magnetic field (Fig. 5,a). The total gun current is displacement current. At voltage maximum a current is equal to zero. That is corresponding of 20-th nanosecond. The magnetic field turning on initiates the current at b) and c) picture of Fig. 6. The voltage value low than 600 kV is not enough in this case for the exciting of considerable field or explosive emission.

2. The emission pulse beginning is delayed relative voltage pulse peak.

In this case the emission pulse beginning must be understood as difference between the total current in Fig. 5,b,c and displacement current in Fig. 5,a.

3. The secondary emission pulse delay increase with magnetic field value.

This is validated theoretically [5] and was observed in experiments with magnetrons in secondary emission mode [6].

4. The secondary emission current pulse has shorter rise time than voltage pulse rise time.

All above current pulses obtained during the research have rise time shorter than voltage pulse.

5. Rise time of the secondary emission current pulse is shorter than drop time.

6. There is the second repeat current peak on oscillograms in a few nanoseconds after rise peak.

The nature of this peak can be connected with electron flow transition to the turbulent state and with emission transition to the self-sustained mode. The emission

value can be higher at such transition. In any case, such repeat peak was always observed at relatively low voltage nearly 60 kV [2]. It was observed on the oscilloscope in nanosecond resolution when the emission mechanism doesn't require being proved. This was in cases when the explosive emission was hard for excitation due to low field and low voltage values. The secondary emission mechanism is remained only in high vacuum conditions. Repeat peaks are observed on Fig. 5,b nearly 25-th ns and c) nearly 30-th ns.

7. *The secondary emission excitation is suppressed in high magnetic fields.*

This takes place and corresponds to the Fig. 5,d. The emission suppression in the highest magnetic field observed in this research is well explained by secondary emission nature. These follows from shape of the initiation region obtained theoretically [5] in coordinates voltage-magnetic field. It can be considered as particular case of previous item 3 with infinitely high delay.

8. *The secondary emission current value is lower considerably of the explosive emission current value.*

Space charge forces limit the maximum current value. However, back electrons besides emitted electrons present in an electron flow. Back electron increase space charge forces in an electron flow and reduces maximum current.

According to the known results from publications [7], the beam current value is up to 10 kA at the explosive emission in magnetic- insulated cathode. This is the diode with same cathode material and similar electrode diameters having operated at voltage values up to 600 kV.

For the comparison, the maximum current obtained in present research is not higher of 5 kA in magnetic field that points on the possibility of its secondary emission nature.

9. *The current repeats the voltage shape on the pulse peak after the current exciting.*

The identifier is observed at long microsecond triangle-shaped pulse (see Fig. 3). At long pulses the current-voltage dependence is continues and is close to the order of 2 that follows from the scaling theory [3]. In case of the explosive emission the plasma boundary motion causes the current rising at constant voltage.

10. *The beam trace on the collector is hollow.*

The secondary emission is initiated only from the side surface where the electron bombardment is possible. The beam moves along lines of force of the magnetic field and the collector repeats the emission region. The experiment in low voltage secondary emission mode confirms this conclusion. Obtained results confirm generally this identifier (see Fig. 4).

CONCLUSIONS

All above identifiers confirm the presence of secondary emission at high voltage values up to 600 kV. The achieving current level is enough high for replacement all types of heating cathodes in modern accelerator facilities up to pulse power klystrons [8] and linear in-

duction accelerator. Another exotic application may be in high current polarized electron injectors [9].

ACKNOWLEDGEMENT

I express greater thank to Dr. M.I. Gaponenko and Dr. A.G. Ponomarev for your assistance in experiment. The research of high current gun is supported by University of St. Andrews, UK and by the governments of USA and Canada through the intergovernmental fund STCU in frame of the project № 1968.

REFERENCES

1. S.A. Cherenshchykov, B.G. Safronov, V.S. Balagura. Short-pulses electron guns with no heating cathodes for linear accelerators // *Problems of Atomic Science and Technology. Series "Nuclear Physics Investigations"* 4(25). 1992, p. 48-51.
2. S.A. Cherenshchykov. The multipactor emission of electrons in the cold-cathode magnetron gun // *Proceeding to reports of 13-Th. Conference of Charge Particle Accelerators. JINR, Dubna (13-15 October 1992). Dubna, (2).* 1993, p.142-144.
3. S.A. Cherenshchykov, A.N. Opanasenko, A.N. Dovbnya, and V.V. Zakutin. Secondary emission magnetron injection gun as high current durable electron source. pulsed RF sources for linear colliders // *AIP Conf. Proc., Montauk.* 1994, v. 337, p. 350-359.
4. Y.M. Saveliev, W. Sibbett, and D.M. Parkes. Self-excitation and operational characteristics of the crossed-field secondary emission electron source // *Rev. Sci. Instr.* 1999, v. 70, № 12, p. 4502-4514.
5. S.A. Cherenshchykov. About the magnetron start with a cold cathode at the trailing edge of the voltage pulse // *Elektronnaja Tehnika. Series "Elektronika SVCh"*. 1973, № 6, p. 20-28 (in Russian).
6. S.A. Cherenshchykov, V.D. Naumenko. Investigation of the magnetron start with a cold secondary-emission cathode at the trailing edge of the voltage pulse // *Izvestiya Vyschikh Uchebnykh Zavedenii "Radiofizika"*, 1984, v. 27, № 2, p. 250-256 (in Russian).
7. I.Z. Gleizer, A.N. Didenko, Uj.P. Usov, V.I. Tsvetkov, A.A. Shatanov. Cross-field current in electron diode with magnetic insulation // *Sov. Journ. Tech. Phys.* 1980, v. 50, № 6, p. 1323-1326.
8. S.A. Cherenshchykov, A.N. Opanasenko, G.M. Ivanov, L.A. Makhnenko. Possible thermionic gun replacement with secondary emission magnetron gun in powerful klystron amplifiers // *Problems of Atomic Science and Technology. Series "Nuclear Physics Investigations"*. 1997, v. 4, 5, p. 40-42.
9. S.A. Cherenshchykov. Proposal about high-current polarized electron source with long lifetime on the base of secondary-emission magnetron injection gun. // *The 18th Intern. Conf. on High Energy Accelerators / Epochal Tsukuba, Tsukuba, Japan, March 26-30, 2001.*

Article received 30.04.2015

МУЛЬТИКИЛОАМПЕРНАЯ МАГНЕТРОННАЯ ПУШКА В РЕЖИМЕ ВТОРИЧНОЙ ЭМИССИИ ПРИ РЕЛЯТИВИСТСКОМ НАПРЯЖЕНИИ

С.А. Черенчиков

Магнетронная пушка на напряжение до 1000 кВ и ток свыше 1 кА была испытана в импульсном режиме. Установлена вторично-эмиссионная природа тока пучка. Идентификация была проведена на основе особенностей, характерных для тока вторичной эмиссии. Пушка может быть использована для ускорителей заряженных частиц и мощных источников высокой частоты.

МУЛЬТІКІЛОАМПЕРНА МАГНЕТРОННА ПУШКА В РЕЖИМІ ВТОРИННОЇ ЕМІСІЇ ЗА РЕЛЯТИВІСТСЬКОЮ НАПРУГОЮ

С.О. Черенчиков

Магнетронна пушка на напругу до 1000 кВ і струм понад 1 кА була випробувана в імпульсному режимі. Встановлено вторинно-емісійна природа струму пучка. Ідентифікація була проведена на основі особливостей, характерних для струму вторинної емісії. Пушка може бути використана для прискорювачів заряджених частинок і потужних джерел високої частоти.